

## Cylindrical Proximity Sensor

- High sensing distance
- Stainless steel and brass housing
- Two housing length for each type
- Pre-wired and Plug-in connector types
- Short -circuit protection and reverse polarity protection

## Ordering Information

### 1. Cable types

#### 1.1 Brass housing

Diameter	Type			Output			
	Length	Mounting	Sensing Distance	NPN / NO	NPN / NC	PNP / NO	PNP / NC
Ø6,5	30mm	Shielded	1,5mm	E2EL-C1R5E1 2M	E2EL-C1R5E2 2M	E2EL-C1R5F1 2M	E2EL-C1R5F2 2M
	32mm	Non-shielded	2,0mm	E2EL-C2ME1 2M	E2EL-C2ME2 2M	E2EL-C2MF1 2M	E2EL-C2MF2 2M
	45mm	Shielded	1,5mm	E2EL-C1R5E1-L 2M	E2EL-C1R5E2-L 2M	E2EL-C1R5F1-L 2M	E2EL-C1R5F2-L 2M
	47mm	Non-shielded	2,0mm	E2EL-C2ME1-L 2M	E2EL-C2ME2-L 2M	E2EL-C2MF1-L 2M	E2EL-C2MF2-L 2M
M8	30mm	Shielded	1,5mm	E2EL-X1R5E1 2M	E2EL-X1R5E2 2M	E2EL-X1R5F1 2M	E2EL-X1R5F2 2M
	32mm	Non-shielded	2,0mm	E2EL-X2ME1 2M	E2EL-X2ME2 2M	E2EL-X2MF1 2M	E2EL-X2MF2 2M
	45mm	Shielded	1,5mm	E2EL-X1R5E1-L 2M	E2EL-X1R5E2-L 2M	E2EL-X1R5F1-L 2M	E2EL-X1R5F2-L 2M
	47mm	Non-shielded	2,0mm	E2EL-X2ME1-L 2M	E2EL-X2ME2-L 2M	E2EL-X2MF1-L 2M	E2EL-X2MF2-L 2M
M12	41mm	Shielded	2,0mm	E2EL-X2E1 2M	E2EL-X2E2 2M	E2EL-X2F1 2M	E2EL-X2F2 2M
		Shielded	4,0mm	E2EL-X4E1-D 2M	E2EL-X4E2-D 2M	E2EL-X4F1-D 2M	E2EL-X4F2-D 2M
		Non-Shielded	4,0mm	E2EL-X4ME1 2M	E2EL-X4ME2 2M	E2EL-X4MF1 2M	E2EL-X4MF2 2M
	53mm	Shielded	2,0mm	E2EL-X2E1-L 2M	E2EL-X2E2-L 2M	E2EL-X2F1-L 2M	E2EL-X2F2-L 2M
		Shielded	4,0mm	E2EL-X4E1-DL 2M	E2EL-X4E2-DL 2M	E2EL-X4F1-DL 2M	E2EL-X4F2-DL 2M
		Non-shielded	4,0mm	E2EL-X4ME1-L 2M	E2EL-X4ME2-L 2M	E2EL-X4MF1-L 2M	E2EL-X4MF2-L 2M
M18	40mm	Shielded	5,0mm	E2EL-X5E1 2M	E2EL-X5E2 2M	E2EL-X5F1 2M	E2EL-X5F2 2M
		Shielded	8,0mm	E2EL-X8E1-D 2M	E2EL-X8E2-D 2M	E2EL-X8F1-D 2M	E2EL-X8F2-D 2M
		Non-shielded	8,0mm	E2EL-X8ME1 2M	E2EL-X8ME2 2M	E2EL-X8MF1 2M	E2EL-X8MF2 2M
	73mm	Shielded	5,0mm	E2EL-X5E1-L 2M	E2EL-X5E2-L 2M	E2EL-X5F1-L 2M	E2EL-X5F2-L 2M
		Shielded	8,0mm	E2EL-X8E1-DL 2M	E2EL-X8E2-DL 2M	E2EL-X8F1-DL 2M	E2EL-X8F2-DL 2M
		Non-shielded	8,0mm	E2EL-X8ME1-L 2M	E2EL-X8ME2-L 2M	E2EL-X8MF1-L 2M	E2EL-X8MF2-L 2M
M30	40mm	Shielded	10,0mm	E2EL-X10E1 2M	E2EL-X10E2 2M	E2EL-X10F1 2M	E2EL-X10F2 2M
		Non-shielded	15,0mm	E2EL-X15ME1 2M	E2EL-X15ME2 2M	E2EL-X15MF1 2M	E2EL-X15MF2 2M
	80mm	Shielded	10,0mm	E2EL-X10E1-L 2M	E2EL-X10E2-L 2M	E2EL-X10F1-L 2M	E2EL-X10F2-L 2M
		Non-shielded	15,0mm	E2EL-X15ME1-L 2M	E2EL-X15ME2-L 2M	E2EL-X15MF1-L 2M	E2EL-X15MF2-L 2M

## 1.2 Stainless steel housing

Type				Output			
Diameter	Length	Mounting	Sensing Distance	NPN / NO	NPN / NC	PNP / NO	PNP / NC
Ø6,5	30mm	Shielded	2,0mm	E2EL-C2E1-DS 2M	E2EL-C2E2-DS 2M	E2EL-C2F1-DS 2M	E2EL-C2F2-DS 2M
	45mm	Shielded	2,0mm	E2EL-C2E1-DSL 2M	E2EL-C2E2-DSL 2M	E2EL-C2F1-DSL 2M	E2EL-C2F2-DSL 2M
M8	30mm	Shielded	2,0mm	E2EL-X2E1-DS 2M	E2EL-X2E2-DS 2M	E2EL-X2F1-DS 2M	E2EL-X2F2-DS 2M
	45mm	Shielded	2,0mm	E2EL-X2E1-DSL 2M	E2EL-X2E2-DSL 2M	E2EL-X2F1-DSL 2M	E2EL-X2F2-DSL 2M
M12	41mm	Shielded	4,0mm	E2EL-X4E1-DS 2M	E2EL-X4E2-DS 2M	E2EL-X4F1-DS 2M	E2EL-X4F2-DS 2M
	53mm	Shielded	4,0mm	E2EL-X4E1-DSL 2M	E2EL-X4E2-DSL 2M	E2EL-X4F1-DSL 2M	E2EL-X4F2-DSL 2M
M18	40mm	Shielded	8,0mm	E2EL-X8E1-DS 2M	E2EL-X8E2-DS 2M	E2EL-X8F1-DS 2M	E2EL-X8F2-DS 2M
	73mm	Shielded	8,0mm	E2EL-X8E1-DSL 2M	E2EL-X8E2-DSL 2M	E2EL-X8F1-DSL 2M	E2EL-X8F2-DSL 2M

## 2. Plug types

### 2.1 Brass housing

Type				Output			
Diameter / Connection	Length	Mounting	Sensing Distance	NPN / NO	NPN / NC	PNP / NO	PNP / NC
Ø6,5 / Plug M8	45mm	Shielded	1,5mm	E2EL-C1R5E1-M3	E2EL-C1R5E2-M3	E2EL-C1R5F1-M3	E2EL-C1R5F2-M3
	47mm	Non-shielded	2,0mm	E2EL-C2ME1-M3	E2EL-C2ME2-M3	E2EL-C2MF1-M3	E2EL-C2MF2-M3
	54mm	Shielded	1,5mm	E2EL-C1R5E1-M3L	E2EL-C1R5E2-M3L	E2EL-C1R5F1-M3L	E2EL-C1R5F2-M3L
	56mm	Non-shielded	2,0mm	E2EL-C2ME1-M3L	E2EL-C2ME2-M3L	E2EL-C2MF1-M3L	E2EL-C2MF2-M3L
M8 / Plug M8	45mm	Shielded	1,5mm	E2EL-X1R5E1-M3	E2EL-X1R5E2-M3	E2EL-X1R5F1-M3	E2EL-X1R5F2-M3
	47mm	Non-shielded	2,0mm	E2EL-X2ME1-M3	E2EL-X2ME2-M3	E2EL-X2MF1-M3	E2EL-X2MF2-M3
	54mm	Shielded	1,5mm	E2EL-X1R5E1-M3L	E2EL-X1R5E2-M3L	E2EL-X1R5F1-M3L	E2EL-X1R5F2-M3L
	56mm	Non-shielded	2,0mm	E2EL-X2ME1-M3L	E2EL-X2ME2-M3L	E2EL-X2MF1-M3L	E2EL-X2MF2-M3L
M8 / Plug M12	44mm	Shielded	1,5mm	E2EL-X1R5E1-M1	E2EL-X1R5E2-M1	E2EL-X1R5F1-M1	E2EL-X1R5F2-M1
	46mm	Non-shielded	2,0mm	E2EL-X2ME1-M1	E2EL-X2ME2-M1	E2EL-X2MF1-M1	E2EL-X2MF2-M1
	60mm	Shielded	1,5mm	E2EL-X1R5E1-M1L	E2EL-X1R5E2-M1L	E2EL-X1R5F1-M1L	E2EL-X1R5F2-M1L
	62mm	Non-shielded	2,0mm	E2EL-X2ME1-M1L	E2EL-X2ME2-M1L	E2EL-X2MF1-M1L	E2EL-X2MF2-M1L
M12 / Plug M12	49mm	Shielded	2,0mm	E2EL-X2E1-M1	E2EL-X2E2-M1	E2EL-X2F1-M1	E2EL-X2F2-M1
		Shielded	4,0mm	E2EL-X4E1-DM1	E2EL-X4E2-DM1	E2EL-X4F1-DM1	E2EL-X4F2-DM1
		Non-shielded	4,0mm	E2EL-X4ME1-M1	E2EL-X4ME2-M1	E2EL-X4MF1-M1	E2EL-X4MF2-M1
	60mm	Shielded	2,0mm	E2EL-X2E1-M1L	E2EL-X2E2-M1L	E2EL-X2F1-M1L	E2EL-X2F2-M1L
		Shielded	4,0mm	E2EL-X4E1-DM1L	E2EL-X4E2-DM1L	E2EL-X4F1-DM1L	E2EL-X4F2-DM1L
		Non-shielded	4,0mm	E2EL-X4ME1-M1L	E2EL-X4ME2-M1L	E2EL-X4MF1-M1L	E2EL-X4MF2-M1L
M18 / Plug M12	53mm	Shielded	5,0mm	E2EL-X5E1-M1	E2EL-X5E2-M1	E2EL-X5F1-M1	E2EL-X5F2-M1
		Shielded	8,0mm	E2EL-X8E1-DM1	E2EL-X8E2-DM1	E2EL-X8F1-DM1	E2EL-X8F2-DM1
		Non-shielded	8,0mm	E2EL-X8ME1-M1	E2EL-X8ME2-M1	E2EL-X8MF1-M1	E2EL-X8MF2-M1
	80mm	Shielded	5,0mm	E2EL-X5E1-M1L	E2EL-X5E2-M1L	E2EL-X5F1-M1L	E2EL-X5F2-M1L
		Shielded	8,0mm	E2EL-X8E1-DM1L	E2EL-X8E2-DM1L	E2EL-X8F1-DM1L	E2EL-X8F2-DM1L
		Non-shielded	8,0mm	E2EL-X8ME1-M1L	E2EL-X8ME2-M1L	E2EL-X8MF1-M1L	E2EL-X8MF2-M1L
M30 / Plug M12	55mm	Shielded	10,0mm	E2EL-X10E1-M1	E2EL-X10E2-M1	E2EL-X10F1-M1	E2EL-X10F2-M1
		Non-shielded	15,0mm	E2EL-X15ME1-M1	E2EL-X15ME2-M1	E2EL-X15MF1-M1	E2EL-X15MF2-M1
	80mm	Shielded	10,0mm	E2EL-X10E1-M1L	E2EL-X10E2-M1L	E2EL-X10F1-M1L	E2EL-X10F2-M1L
		Non-shielded	15,0mm	E2EL-X15ME1-M1L	E2EL-X15ME2-M1L	E2EL-X15MF1-M1L	E2EL-X15MF2-M1L

## 2.2 Stainless steel housing

Type				Output			
Diameter / Connection	Length	Mounting	Sensing distance	NPN / NO	NPN / NC	PNP / NO	PNP / NC
M8 / Plug M8	54mm	Shielded	2,0mm	E2EL-X2E1-DM3SL	E2EL-X2E2-DM3SL	E2EL-X2F1-DM3SL	E2EL-X2F2-DM3SL

M12 / Plug M12	49mm / 60mm	Shielded	4,0mm	E2EL-X4E1-DM1S / E2EL-X4E1-DM1SL	E2EL-X4E2-DM1S / E2EL-X4E2-DM1SL	E2EL-X4F1-DM1S / E2EL-X4F1-DM1SL	E2EL-X4F2-DM1S / E2EL-X4F2-DM1SL
M18 / Plug M12	53mm / 80mm	Shielded	8,0mm	E2EL-X8E1-DM1S / E2EL-X8E1-DM1SL	E2EL-X8E2-DM1S / E2EL-X8E2-DM1SL	E2EL-X8F1-DM1S / E2EL-X8F1-DM1SL	E2EL-X8F2-DM1S / E2EL-X8F2-DM1SL

## Specifications

### 1. Brass type

Type	Ø6,5		M8		M12		M18		M30			
Operating voltage	10 to 35 VDC											
Rated supply voltage	24 VDC											
Current consumption	max. 15 mA at 24 VDC											
Sensing object	Ferrous metals											
Mounting ((s)hielded, (n)on-shielded) *	s	n	s	n	s	s	n	s	s	n	s	n
Operating distance in mm	1,5	2,0	1,5	2,0	2,0	4,0	4,0	5,0	8,0	8,0	10,0	15,0
Tolerance of operating distance	±10%											
Standard target size in mm (L x W x H in mm, FE 37)	6,5x6,5x1		8x8x1		12x12x1		18x18x1	24x24x1	30x30x1	45x45x1		
Differential travel	1 % ... 15 % of operating distance											
Max. response frequency in kHz	5,0		5,0		2,0	0,6	1,0	0,5	0,3	0,5	0,25	0,15
Control output Type	E2EL-... E1 type: NPN-NO E2 type: NPN-NC F1 type: PNP-NO F2 type: PNP-NC											
Max-Load	200mA											
Max-on-state Voltage drop	2,5 VDC (at 200mA load current and with 2 m cable)											
Circuit protection	Reverse polarity, output short-circuit											
Indicator	Operating indicator (yellow LED)											
Ambient temperature	Operating: -25° to 70°C											
Humidity	35 to 95 % RH											
Influence of temperature	± 10 % max. of Sn at 23°C in temperature range of -25° to 70°C											
Dielectric strength	1.500 VAC, 50/60 Hz for 1 min. between current carry parts and case											
Electromagnetic compatibility EMC	EN 60947-5-2											
Vibration resistance	Destruction: 10 to 70 Hz, 1,5 mm double amplitude for 1 hour each in X, Y and Z directions											
Shock resistance	Destruction: 300 m/s <sup>2</sup> (approx. 30 G) for 6 times each in X, Y and Z directions											
Enclosure rating	IP 67 (EN 60947-1)											
Connection **	pre-wired	2 m PVC-cable, 3 x 0,14 mm <sup>2</sup>				2 m PVC-cable, 3 x 0,25mm <sup>2</sup>				2m PVC-cable, 3 x 0,5mm <sup>2</sup>		
	Connector	M8 plug,	M8 plug	M12 plug								
Weight in g	pre-wired	long	45	50	75	115		260				
		short	43	48	70	100		200				
	Connector	long	10	15	25	60		155				
		short	8	13	20	50		110				
Material	Case	Brass										
	Sensing face	PBTP										

\*) For detailed mounting instruction please refer to page 15

\*\*\*) PUR cable and different length on request


## 2. Stainless steel type

Type	Ø6,5	M8	M12	M18		
Operating voltage	10 to 35 VDC					
Rated supply voltage	24 VDC					
Current consumption	max. 15 mA at 24 VDC					
Mounting *	Shielded					
Sensing object	Ferrous metals					
Operating distance in mm	2,0	2,0	4,0	8,0		
Tolerance of operating distance	±10%					
Standard target size (L x W x H in mm, FE 37)	6,5x6,5x1	8x8x1	12x12x1	24x24x1		
Differential travel	1 % ... 15 % of operating distance					
Max. response frequency in kHz	4,0	4,0	0,6	0,25		
Control output Type	E2EL-... E1 type: NPN-NO E2 type: NPN-NC F1 type: PNP-NO F2 type: PNP-NC					
Max-Load	200mA					
Max-on-state Voltage drop	2,5 VDC (at 200mA load current and with 2 m cable)					
Circuit protection	Reverse polarity, output short-circuit					
Indicator	Operating indicator (yellow LED)					
Ambient temperature	Operating: -25° to 70°C					
Humidity	35 to 95 % RH					
Influence of temperature	± 10 % max. of Sn at 23°C in temperature range of -25° to 70°C					
Dielectric strength	1.500 VAC, 50/60 Hz for 1 min. between current carry parts and case					
Electromagnetic compatibility EMC	EN 60947-5-2					
Vibration resistance	Destruction: 10 to 70 Hz, 1,5 mm double amplitude for 1 hour each in X, Y and Z directions					
Shock resistance	Destruction: 300 m/s <sup>2</sup> (approx. 30 G) for 6 times each in X, Y and Z directions					
Enclosure rating	IP 67 (EN 60947-1)					
Connection **	pre-wired	2 m PVC-cable, 3 x 0,14 mm <sup>2</sup>		2 m PVC-cable, 3 x 0,25mm <sup>2</sup>		
Connector		-	M8 plug	M12 plug		
Weight in g	pre-wired	long	45	50	75	120
		short	43	48	70	105
	Connector	long	-	10	25	65
		short	-	-	20	55
Material	Case	stainless steel 1.4305 / AISI 303				
	Sensing face	PBTP				

\*) For detailed mounting instruction please refer to page 15


\*\*) PUR cable and different length on request

## Standardized characteristic for lateral approach

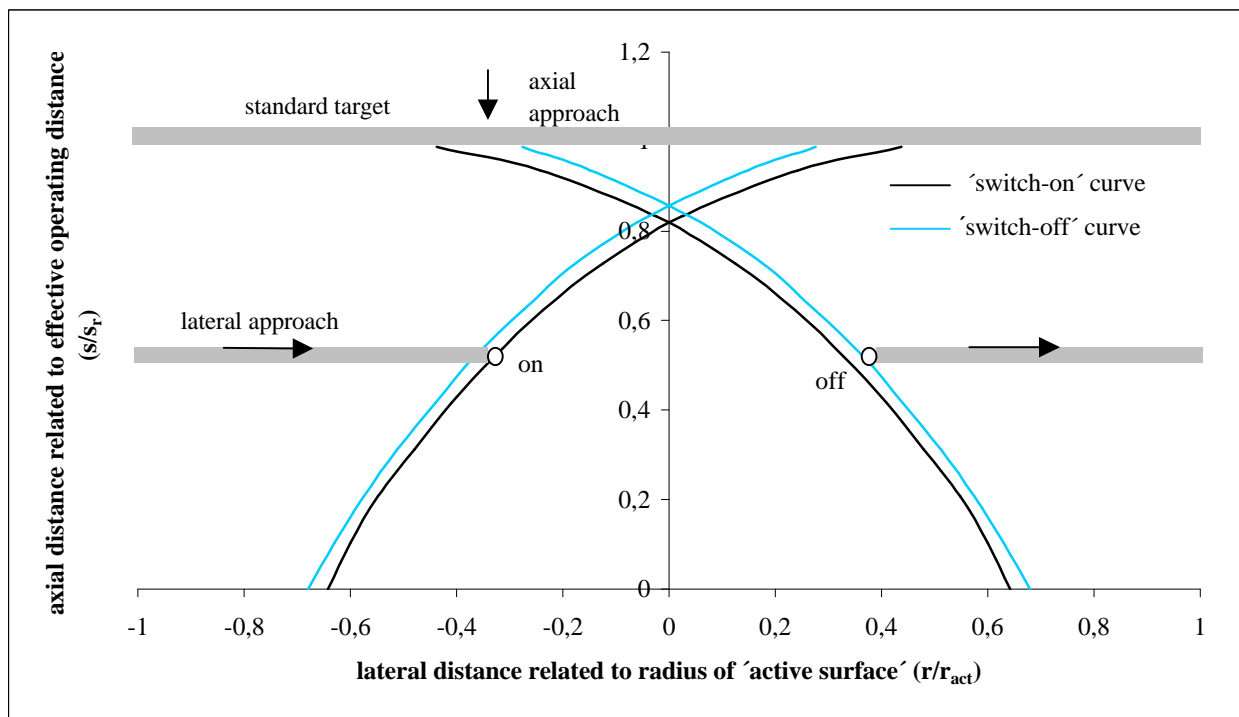


## Output Circuit Diagram and Timing Chart


### NPN Output

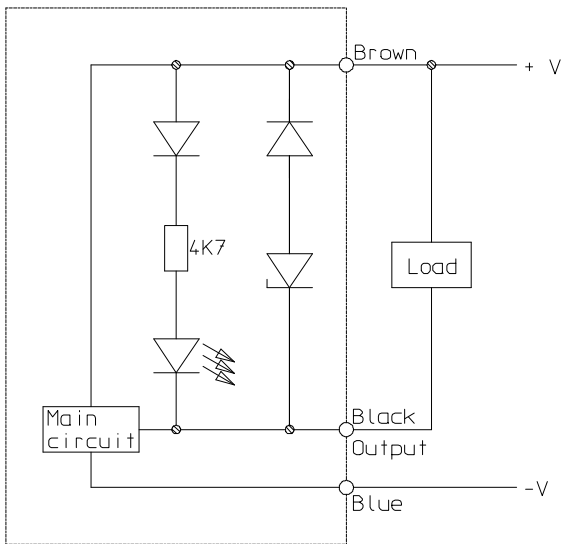


### Output

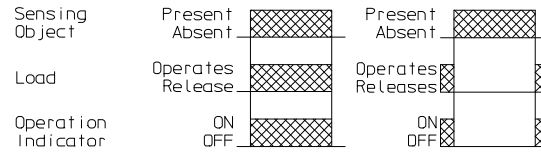

### PNP Output

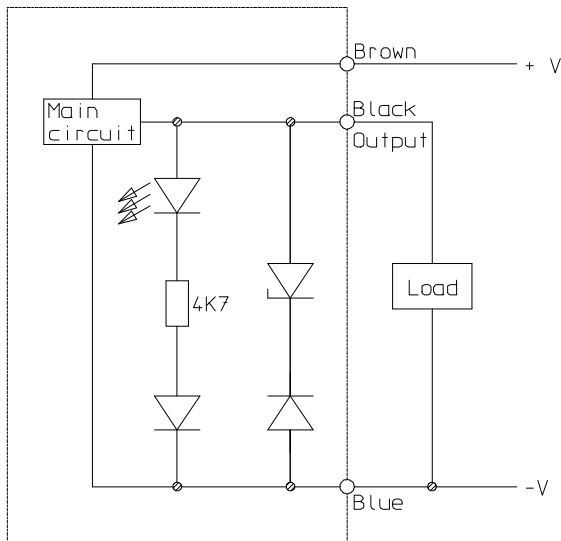


### Output

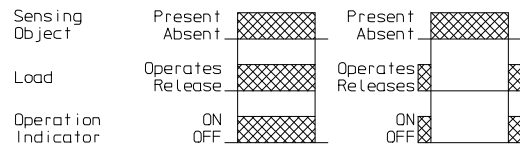


## PIN arrangement at connector types

### 1. Connector M8 (viewed to plug pins)




2. Connector M12 (viewed to plug pins)

NO

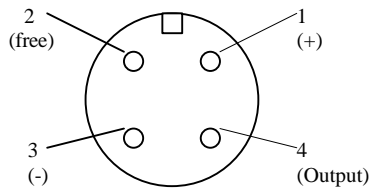


NC

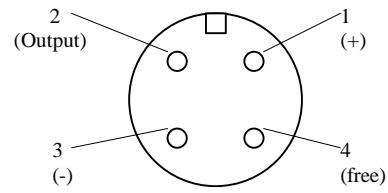


## Dimensions

### 1. Cable types


E2EL-C1R5 2M, E2EL-C2 -DS 2M

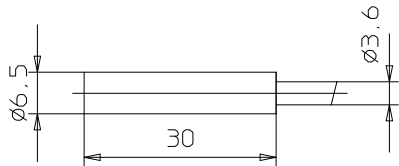


E2EL-C2M 2M

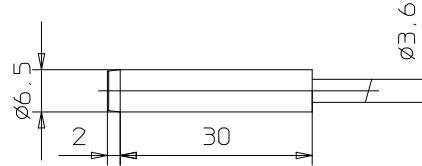


E2EL-C1R5 -L 2M, E2EL-C2 -DSL 2M

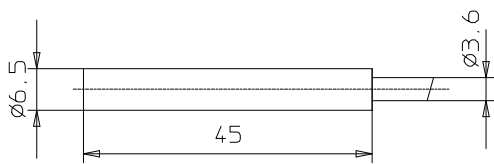


E2EL-C2M -L 2M

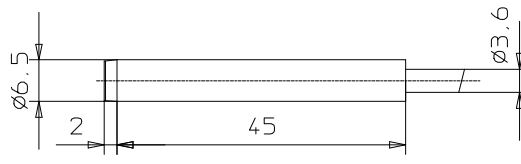


E2EL-X1R5 2M, E2EL-X2 -DS 2M

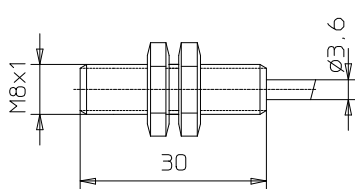


E2EL-X2M 2M

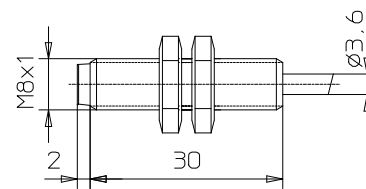


E2EL-X1R5 -L 2M, E2EL-X2 -DSL 2M

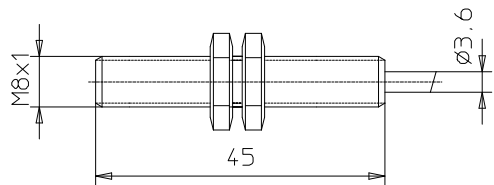


E2EL-X2M -L 2M

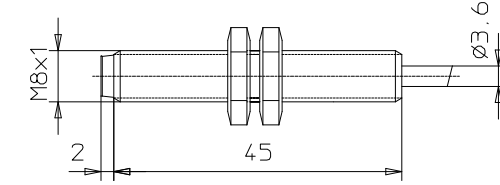

E2EL-X2 2M, E2EL-X4 -D 2M,  
E2EL-X4 -DS 2M

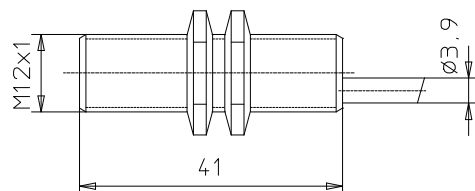


E2EL-X4M 2M

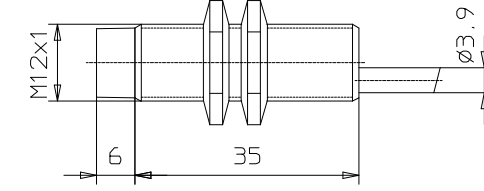





E2EL-X2 -L 2M, E2EL-X4 -DL 2M,  
E2EL-X4 -DSL 2M

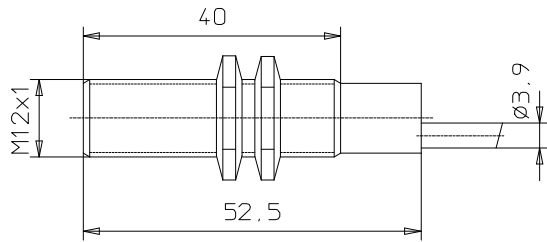


E2EL-X4M -L 2M

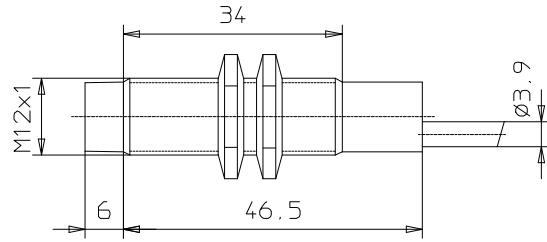


E2EL-X5 2M, E2EL-X8 -D 2M,  
E2EL-X8 -DS 2M

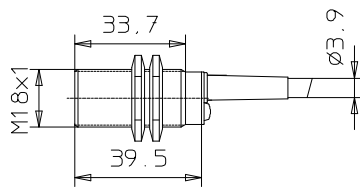


E2EL-X8M 2M

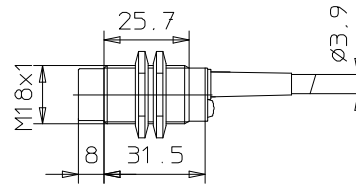


E2EL-X5 -L 2M, E2EL-X8 -DL 2M,  
E2EL-X8 -DSL 2M

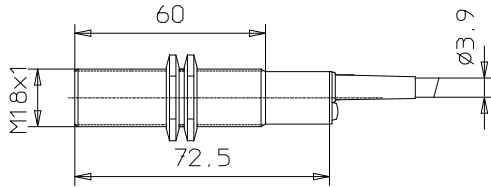


E2EL-X8M -L 2M

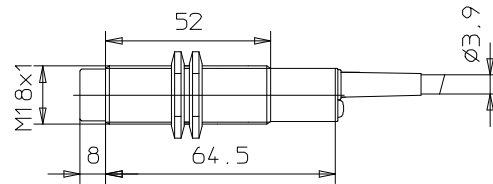


E2EL-X10 2M

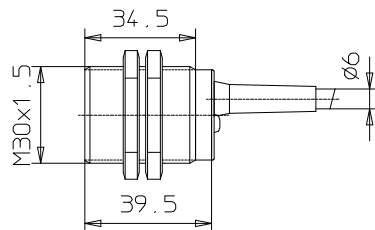


E2EL-X15M 2M

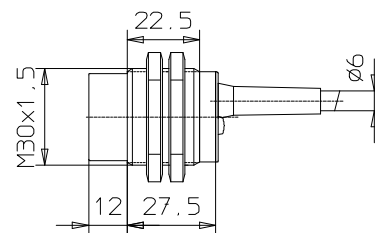

E2EL-X10 -L 2M

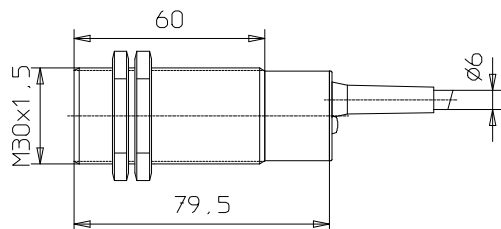


E2EL-X15M -L 2M

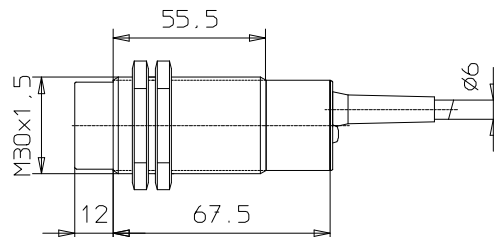


## 2. Plug types


E2EL-C1R5 -M3

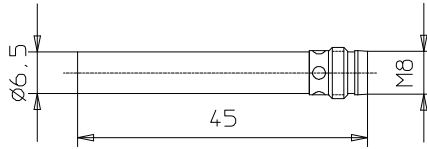


E2EL-C2M -M3

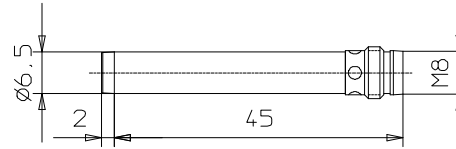


E2EL-C1R5 -M3L

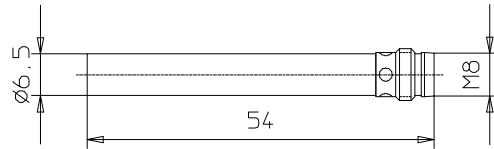


E2EL-C2M -M3L

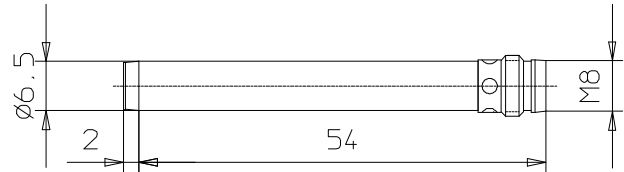


E2EL-X1R5 -M3

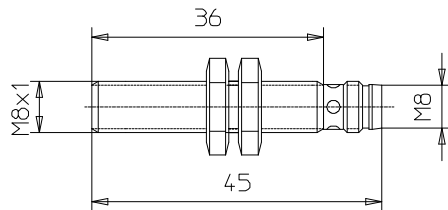


E2EL-X2M -M3

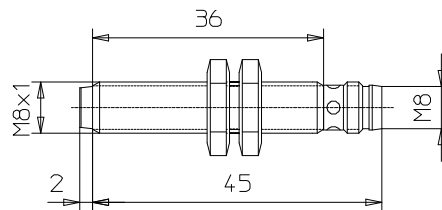


E2EL-X1R5 -M3L, E2EL-X2 -DM3SL

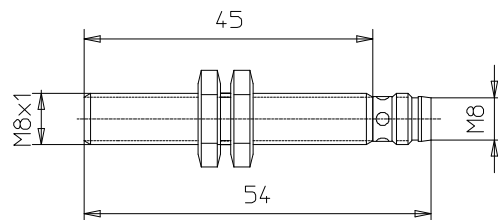


E2EL-X2M -M3L

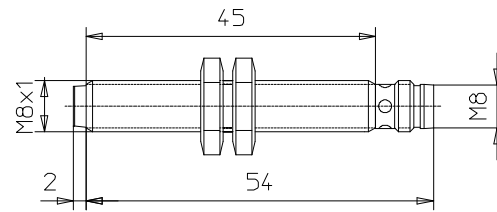


E2EL-X1R5 -M1

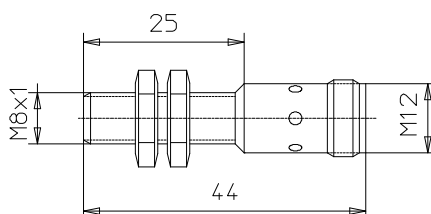


E2EL-X2M -M1

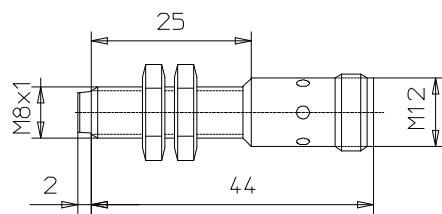


E2EL-X1R5 -M1L

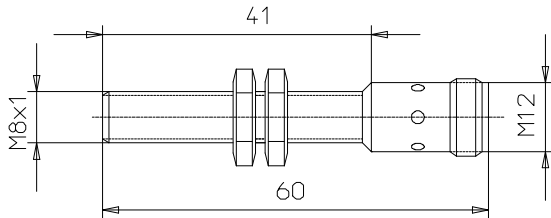


E2EL-X2M -M1L

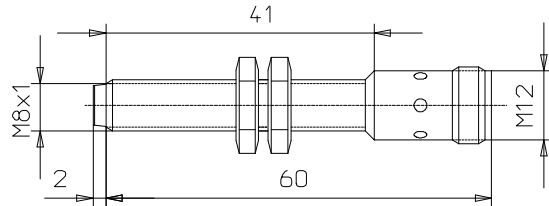


E2EL-X2 -M1, E2EL-X4 -DM1,  
E2EL-X4 -DM1S

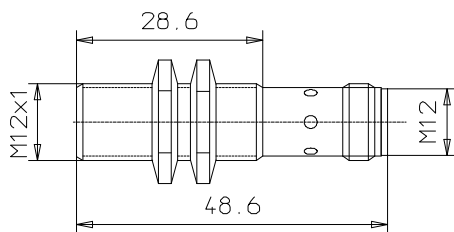


E2EL-X4M -M1

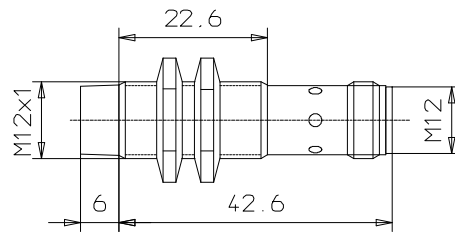


E2EL-X2 -M1L, E2EL-X4 -DM1L,  
E2EL-X4 -DM1SL

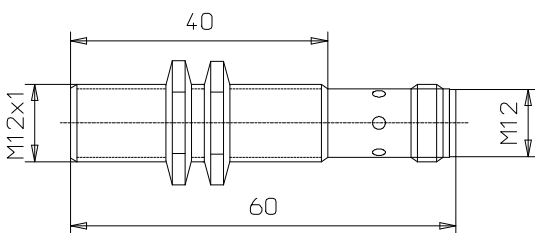


E2EL-X4M -M1L

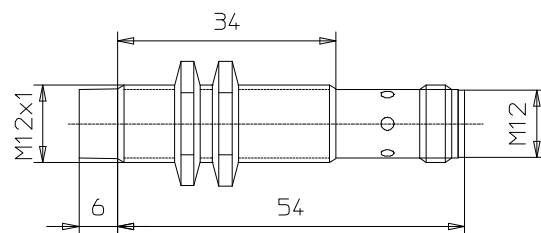


E2EL-X5 -M1, E2EL-X8 -DM1,  
E2EL-X8 -DM1S




E2EL-X8M -M1




E2EL-X5 -M1L, E2EL-X8 -DM1L,  
E2EL-X8 -DM1SL

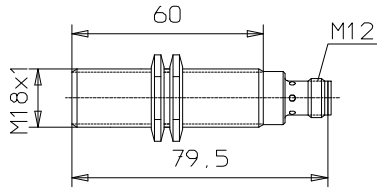


E2EL-X8M -M1L

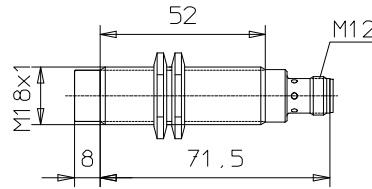


E2EL-X10 -M1




E2EL-X15M -M1





E2EL-X10 -M1L

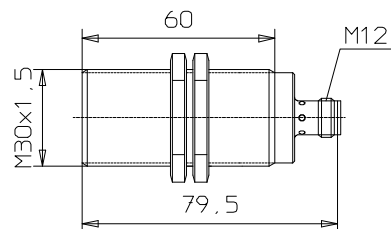

E2EL-X15M -M1L


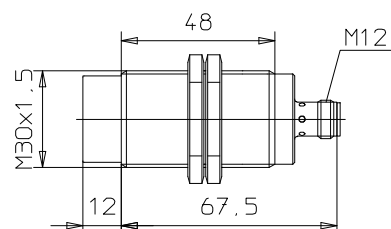


## Caution

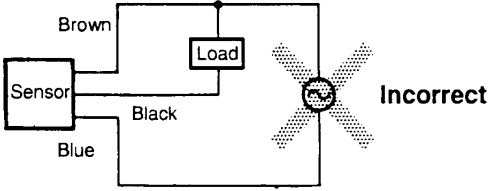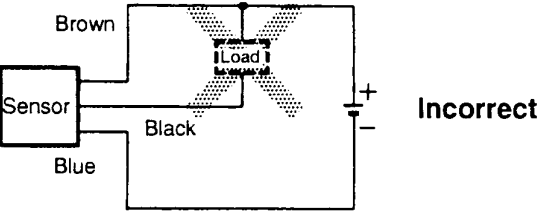Item	Examples
<p><b>Power Supply</b></p> <p>Do not impose an excessive voltage on the E2EL, otherwise it may explode or burn.</p> <p>Do not impose 24 VAC on any E2EL model, otherwise it may explode or burn.</p>	
<p><b>Load short-circuit</b></p> <p>Do not short-circuit the load, or the E2EL may explode or burn.</p> <p>The E2EL's short-circuit protection function is valid, if the polarity of the supply voltage imposed is incorrect and within the rated voltage range.</p>	

### Wiring

Be sure to wire the E2EL and load correctly, otherwise it may explode or burn.

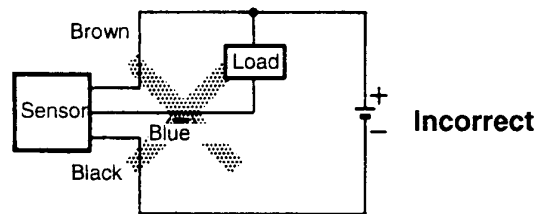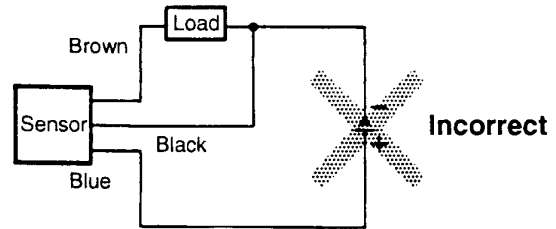

## Correct Use

### Installation

#### Power Reset Time

The Proximity Sensor is ready to operate within 100 ms after power is supplied. If power supplies are connected to the Proximity Sensor and load respectively, be sure to supply power to the Proximity Sensor before supplying power to the load.

#### Power OFF

The Proximity Sensor may output a pulse signal when it is turned off. Therefore, it is recommended to turn off the load before turning off the Proximity Sensor.

#### Power Supply Transformer

When using a DC power supply, make sure that the DC power supply has an insulated transformer. Do not use a DC power supply with an auto-transformer.

#### Sensing Object

Metal Coating:

The sensing distance of the Proximity Sensor vary with the metal coating on sensing objects.

## Wiring

### High-tension Lines

#### **Wiring through Metal Conduit**

If there a power or high-tension line near the cord of the Proximity Sensor, wire the cord through an independent metal conduit to prevent against Proximity Sensor damage or malfunctioning.

### Core Tractive Force

Do not pull cords with the tractive force exceeding the following:

pull force (N) = 20 x cable diameter (mm)

## Mounting

The Proximity Sensor must not be subjected to excessive shock with a hammer when it is installed, otherwise the Proximity Sensor may be damaged or lose the water-resistivity.

## Effects of Surrounding Metal

### Shielded types:

Shielded types allow direct installation on metal plates in an embedded manner without performance change. A minimum distance of  $3s_n$  is required between the active surface and a metallic surface in front of the device. (Fig. 1).

For SUS shielded types the following minimum distances are required to avoid performance change (see Fig.2 and table below):

Shielded SUS Types	Free zone
E2EL-C2 -DS	0,5mm
E2EL-X2 -DS	0,5mm
E2EL-X4 -D S	1,0mm
E2EL-X8 -D S	2,0mm

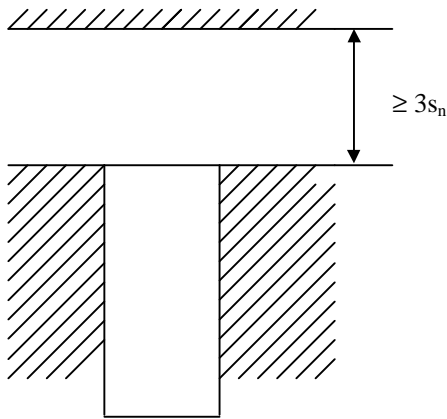


Fig.1: Shielded type (except SUS)

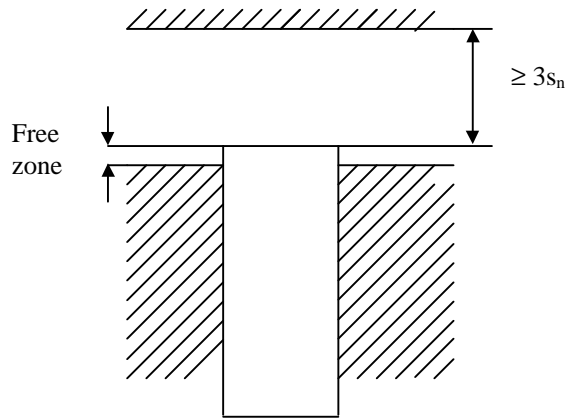


Fig.2: Shielded SUS type

### Non-shielded types

Installation of non-shielded types in metal require the minimum distances according to Fig.3

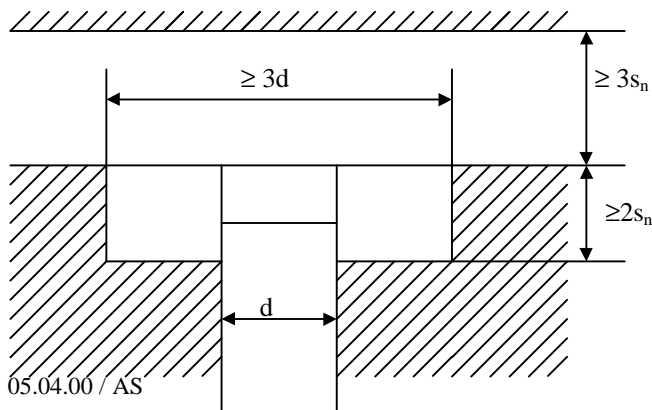




Fig.3: Non-shielded type



## **Environment**

### **Water-resistivity**

Do not use the Proximity Sensor underwater, outdoors or in the rain.

### **Operating Environment**

Be sure to use the Proximity Sensor within operating ambient temperature range and do not use the Proximity Sensor outdoors so that its reliability and life expectancy can be maintained. Although the Proximity Sensor is water resistive, a cover to protect the Proximity Sensor from water or soluble machining oil is recommended so that its reliability and life expectancy can be maintained. Do not use the Proximity Sensor in an environment with chemical gas (e. G., strong alkaline or acid gases including nitric, chromic, and concentrated sulfuric acid gases).

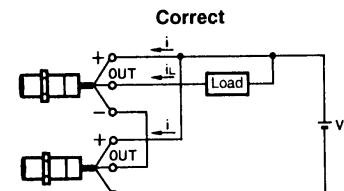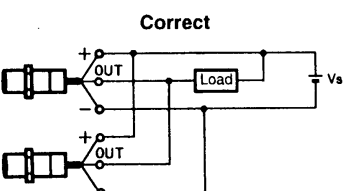Connection type	Method	Description
<p><b>AND</b> (serial connection)</p>	<p style="text-align: center;">Correct</p>  <p>The diagram shows two sensors connected in series. The output of the first sensor is connected to the input of the second sensor. The output of the second sensor is connected to a load, which is then connected to a supply voltage source <math>V_s</math>. Current <math>i</math> flows through the sensors, and <math>i_L</math> flows through the load.</p>	<p>The Sensors connected together must satisfy the following conditions:</p> <p><math>i_L + (N-1) \times i</math> Upper-limit of control</p> <p><math>V_S - N \times V_R</math> Load operating voltage</p> <p><math>N =</math> No. of Sensors</p> <p><math>V_R =</math> Residual voltage of each Sensor</p> <p><math>V_S =</math> Supply voltage</p> <p><math>i =</math> Current consumption of the</p> <p><math>i_L =</math> Load current</p> <p>If the MY Relay, which operate at 24 VDC, is used as a load for example, a maximum of two Proximity Sensors can be connected to the load.</p>
<p><b>OR</b> (parallel connection)</p>	<p style="text-align: center;">Correct</p>  <p>The diagram shows two sensors connected in parallel. The output of each sensor is connected to a common load, which is then connected to a supply voltage source <math>V_s</math>.</p>	<p>A minimum of three Sensors with current outputs can be connected in parallel. The number of Sensors connected in parallel varies with the Proximity Sensor model.</p>